

MINI-CAN

CONTACTLESS CAN READING ACCESSORY

MINI-CAN is a new and small warranty-friendly solution that connects into the CAN Bus system to remotely access added understanding into the performance and usage of a vehicle. Vehicle manufacturer's warranty is not violated!



USE CASES



LIGHT
VEHICLES




HEAVY DUTY
TRANSPORT



SPECIAL
TRANSPORT



INTERNATIONAL
LOGISTICS

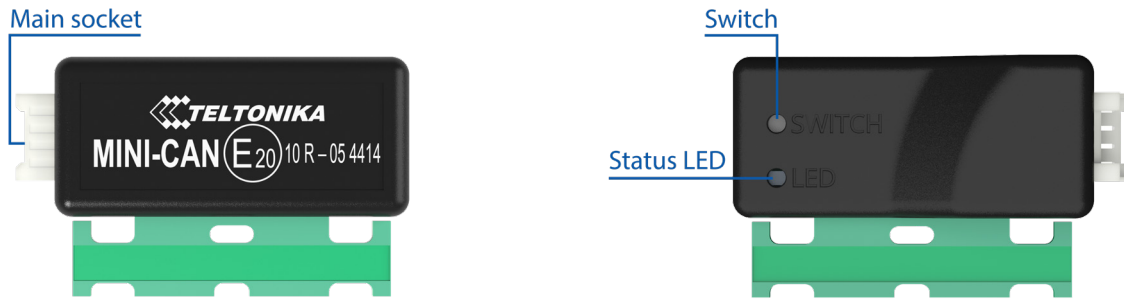

Technical data

Supported by	LV-CAN200, ALL-CAN300, FMB64X, FMC64X, FMM64X series and FMB140
Input voltage range	9 - 63 V DC
Power consumption	At 12V < 1,6 mA (Standby) At 12V < 8,3 mA (Working)
Operating temperature range	-40°C to +85°C
Operating humidity	Max 85 % non-condensing
LED indication	1 status LED light
Features	Contactless CAN reading Warranty friendly CAN-BUS speed from 33,33 to 500 kb/s Automatically sets CAN Low, CAN High polarity Automatically adjusts signal level and speed
Dimensions	40 x 18 x 14 mm (L x W x H)
Weight	9,1 g

